


## Siding/Fencing/Trim Nails

### 15° Wire Coil, Full Round Head, Ring-Shank Siding Nail

#### Features:

- Ideal for use in fiber-cement boards
- Checker pattern on heads blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Generous underhead fillet allows nails to be driven flush or countersunk, without crushing surrounding wood
- Annular ring shank increases withdrawal resistance to provide a secure attachment that reduces cupping of siding boards
- Slender gauge and diamond point for easier driving
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

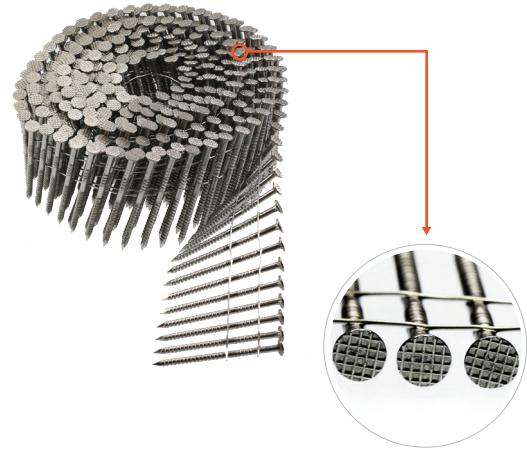

#### Compatible Pneumatic Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](http://strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

<b>Bostitch®</b>	N64C, N66C, N75C
<b>Duo-Fast®</b>	P275C
<b>Grip-Rite®</b>	GRTCS250
<b>Hitachi®</b>	NV65AH, NV75AG
<b>Max®</b>	CN55, CN665, CN565, CN565S, CN550S (up to 2")
<b>Senco®</b>	SCN60XP, SCN49, SCN 65XP, Pallet Pro57F (up to 2¼")

#### Type 316 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
3d	1¼	0.092	0.221	1,800	T13A125SNJ
4d	1½	0.092	0.221	1,800	T13A150SNJ
5d	1¾	0.092	0.221	1,800	T13A175SNJ
6d	2	0.092	0.221	1,800	T13A200SNJ
7d	2¼	0.092	0.221	1,800	T13A225SNJ
8d	2½	0.092	0.221	1,800	T13A250SNJ

#### Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
3d	1¼	0.092	0.221	3,600	S13A125SNC
3d	1¼	0.092	0.221	1,500	S13A125SNBP
4d	1½	0.092	0.221	3,600	S13A150SNC
4d	1½	0.092	0.221	1,500	S13A150SNBP
5d	1¾	0.092	0.221	3,600	S13A175SNC
5d	1¾	0.092	0.221	1,200	S13A175SNBP
6d	2	0.092	0.221	3,600	S13A200SNC
6d	2	0.092	0.221	1,200	S13A200SNBP
7d	2¼	0.092	0.221	3,600	S13A225SNC
7d	2¼	0.092	0.221	900	S13A225SNBP
8d	2½	0.092	0.221	3,600	S13A250SNC
8d	2½	0.092	0.221	900	S13A250SNBP

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.