

## Roofing Nails

### 15° Wire Coil, Full Round Head, Smooth-Shank Roofing Nail


#### Features:

- Ideal for asphalt and synthetic slate roofing
- Large flat head, diamond point for easier driving
- Annular ring shank increases withdrawal resistance to provide a secure attachment to OSB or plywood roof decks
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

#### Compatible Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](https://www.strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

Brand	Model
Bosch®	RN175
Bostitch®	RN46
DeWalt®	D51321
Grip-Rite®	GRTCR175
Hitachi®	NV45AB2, NV45AE
Makita®	AN453
Max®	CN445R, CN450R
Paslode®	R175-C, CR175C
Porter Cable®	RN175A
Ridgid®	R175RND
Senco®	RoofPro 455XP

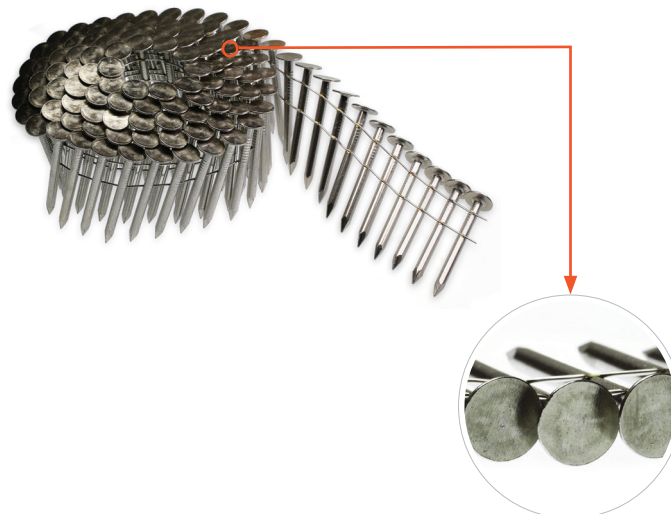

#### Type 316 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
4d	1½	0.120	¾	3,600	T11N150RNJ

#### Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
—	¾	0.120	¾	7,200	S11N075RNB
—	7⁄8	0.120	¾	7,200	S11N087RNB
2d	1	0.120	¾	7,200	S11N100RNB
3d	1¼	0.120	¾	7,200	S11N125RNB
3d	1¼	0.120	¾	2,400	S11N125RNJ
4d	1½	0.120	¾	7,200	S11N150RNB
4d	1½	0.120	¾	2,400	S11N150RNJ
5d	1¾	0.120	¾	7,200	S11N175RNB
5d	1¾	0.120	¾	2,400	S11N175RNJ

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.