

## Framing Nails – Plastic Strip


### 31°–34° Plastic Strip, Full Round Head, Ring-Shank Nail

#### Features:

- Checker pattern on head blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Annular ring shank increases withdrawal resistance to provide a secure attachment
- Type 304 stainless steel for applications requiring high corrosion resistance

#### Compatible Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](http://strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

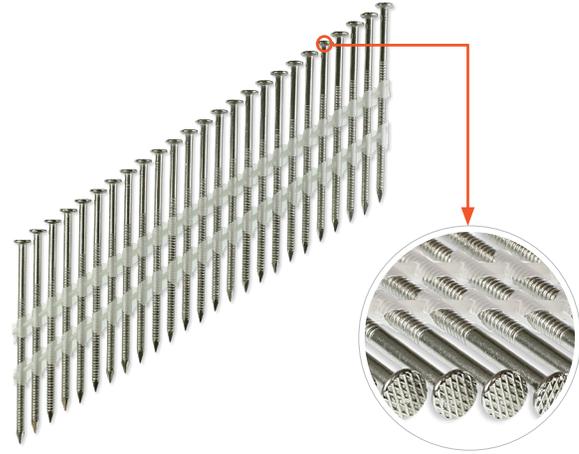

Brand	Model
Bosch®	SN350-34C
Bostitch®	F33PT
DeWalt®	D51825, D51822
Grip-Rite®	GRTFC83 (up to 3¼"), GRTCH350
Hitachi®	NR83AA3 (up to 3¼"), NR90ADPR, NR90GC2
Makita®	AN943
Max®	SN883CH/34 (up to 3¼"), SN890CH/34
Paslode®	PF350S, CF325 (up to 3¼"), F350S, 900420 (up to 3¼")
Porter Cable®	FC350A
Ridgid®	R350CHA
Senco®	SN901XP (up to 3¼"), SN951XP, GT90CH, FramePro601, FramePro701XP

### Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Model No.
8d	2¾	0.113	¾	1,000	S12A237P31
10d	3	0.120	¾	1,000	S11A300P31

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.