




INTERNATIONAL FASTENERS, INC.



SPEC DATA SUBMITTAL SHEET


Dagger-Con™ Concrete Screws • Hex Flange Quick-Con • Dagger-Guard Coating™

Size	TPI	Ctn Qty	Daggerz™ Part Number	Drive	Head	Point	Drill Bit
1/4 x 1-3/4	15	2,000	QCCT14134	5/16"	Hex Flange	Diamond	3/16"
1/4 x 2-1/4	15	1,000	QCCT14214	5/16"	Hex Flange	Diamond	3/16"
1/4 x 3	15	1,000	QCCT1430	5/16"	Hex Flange	Diamond	3/16"
1/4 x 4	15	500	QCCT1440	5/16"	Hex Flange	Diamond	3/16"
1/4 x 5	15	500	QCCT1450	5/16"	Hex Flange	Diamond	3/16"
1/4 x 6	15	250	QCCT1460	5/16"	Hex Flange	Diamond	3/16"
3/8 x 3	16	350	QCCT3803	9/16"	Hex Flange	Diamond	5/16"

<i>material:</i>	C1022 LOW CARBON STEEL, CORE HARDNESS: HV240-425
<i>finish:</i>	Dagger-Guard Coating™ is a three layer, multi step dip/spin bake process which provides 1000 hour salt spray corrosion resistance, offered in WHITE or BRONZE
<i>application:</i>	concrete and masonry screw applications that require a larger bearing surface for added strength.
<i>installation:</i>	Pre-drill hole with masonry bit. Screw gun with depth sensitive nosepiece with installation speed not to exceed 2500 RPM into pre-drilled hole. Overdriving may result in fastener failure or strikeout of the work surface. The fastener is fully seated when the head's bearing surface is flush with the material being attached.

Meets or exceeds the following specifications:

ASTM A510	Specification for General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel (Minimum grade 1018)
ASTM B117	Practice for Operating Salt Spray (Fog) Apparatus

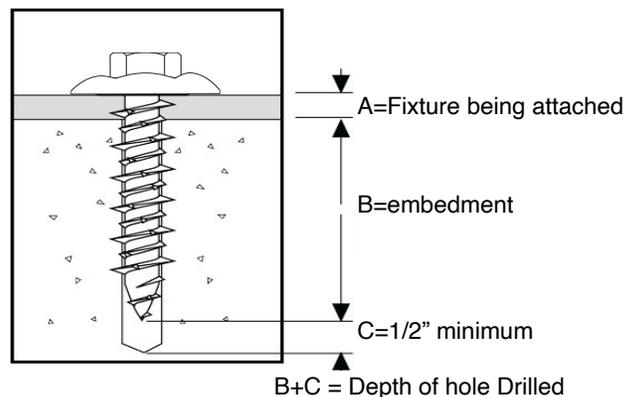

These figures are offered only as a guide and are not guaranteed in any way by International Fasteners, Inc. Appropriate safety factors should be applied to these values for specific purposes. All International Fasteners, Inc. Fasteners are manufactured to IFI's Performance Specifications and Print Drawings.

QCCT.0923