

FlipToggle® Anchor

The FlipToggle is a single-strap hollow-wall anchor. Its unique design securely holds the toggle for easy insertion into the predrilled hole. Once inserted, the spring tab flips the toggle into the right position so that when the collar is tightened the anchor is ready for the bolt. No jammed toggles, broken straps or misaligned bolts.

Features

- Installs into drywall and hollow CMU up to 2½" thick with a 2½" bolt
- Bolt sizes: ¾"-24 thread and ¼"-20 thread
- Simple one-strap design holds toggle perfectly aligned for easy bolt insertion
- This collar ensures centered bolt placement in the hole and does not embed the bolt into the drywall, eliminating the potential for sagging fixtures



FlipToggle Product Data with Bolts

Bolt Thread	Bolt Length (in.)	Model No.	Parts Per Each/Unit	Pack*	Carton
Clamshell					
¾"-24	2½	FT18250C2	2	5 clamshells	10 packs / 50 clamshells
¼"-20	2½	FT25250C2	2	5 clamshells	10 packs / 50 clamshells
¾"-24	2½	FT18250C10	10	5 clamshells	10 packs / 50 clamshells
¼"-20	2½	FT25250C10	10	5 clamshells	10 packs / 50 clamshells
¾"-24	2½	FT18250C25	25	—	5 clamshells
¼"-20	2½	FT25250C25	25	—	5 clamshells
Retail Box					
¾"-24	2½	FT18250R100	100	—	5 retail boxes
¼"-20	2½	FT25250R100	100	—	5 retail boxes

* Distributor to order in full pack quantities


FlipToggle Product Data — No Bolts

Size	Model No.	Parts Per Each/Unit	Carton
Retail Box			
¾"-24	FT18NBR50	50	10 retail boxes
¼"-20	FT25NBR50	50	10 retail boxes
¾"-24	FT18NBR100	100	5 retail boxes
¼"-20	FT25NBR100	100	5 retail boxes




FlipToggle® Anchor


FlipToggle installs in four easy steps: fold, insert, flip and tighten — it's that quick!

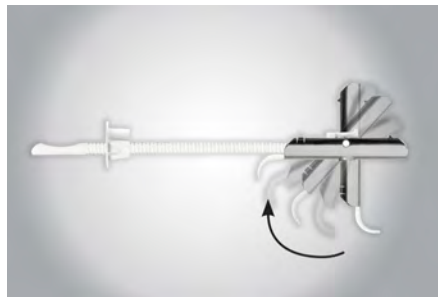


1. Drill a ½" hole. Flip the head of the FlipToggle to align with strap.

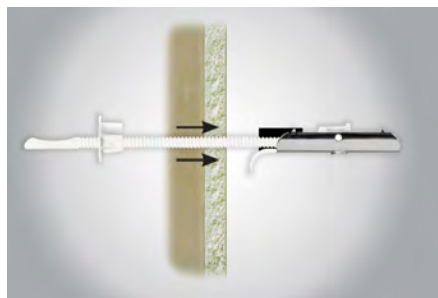



2. Insert the FlipToggle into the drilled hole. When the head is fully inserted, pull the strap to flip the toggle flat against the back of the wall.

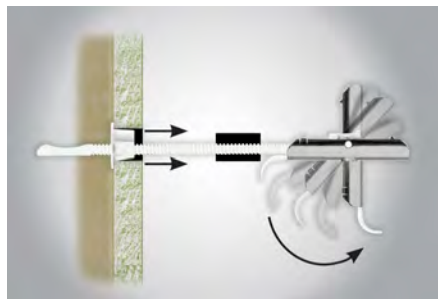

3. Push the collar into the drilled hole until the cap is flush with the wall. Hold the cap against the wall while pulling the strap toward you until it feels reasonably tight.

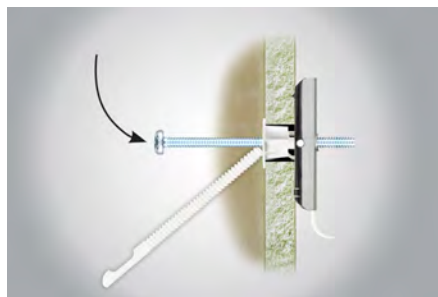

4. Snap off strap flush with collar. Insert the bolt through the fixture into the anchor and tighten securely.

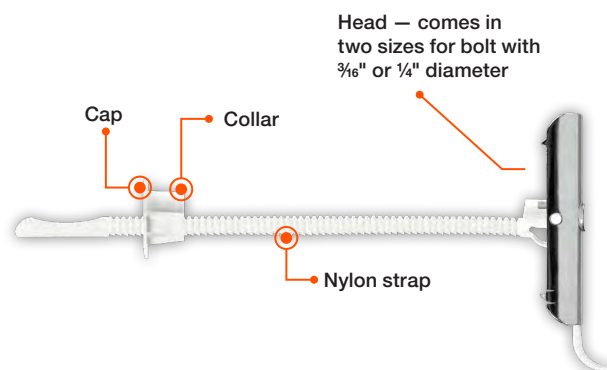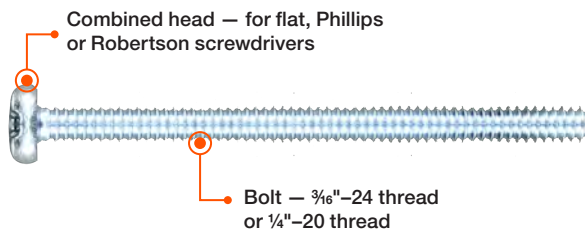

FlipToggle Loads



Material	Size	Drill Size	Tension Loads (lb.)	
			Ultimate	Safe
Drywall ½"	3/16"–24	½"	178	89
	¼"–20	½"	181	90
Drywall 5/8"	3/16"–24	½"	294	147
	¼"–20	½"	299	149
Hollow Block	3/16"–24	½"	807	403
	¼"–20	½"	1,030	515

Safe tension loads listed are based on a safety factor of 2.0.
Due to variation in base material, a higher safety factor may be applied.

* See p. 13 for an explanation of the load table icons.