

HTU

Face-Mount Truss Hanger

The HTU face-mount truss hanger has nail patterns designed specifically for shallow heel heights, so that full allowable loads (with minimum nailing) apply to heel heights as low as 3/8". Minimum and maximum nailing options provide solutions for varying heel heights and end conditions.

Alternate allowable loads are provided for gaps between the end of the truss and the carrying member up to 1/2" max. to allow for greater construction tolerances (maximum gap for standard allowable loads is 1/8" per ASTM D1761 and D7147). See technical bulletin T-C-HANGERGAP at strongtie.com for more information.

Material: 16 gauge

Finish: Galvanized





Installation:

- Use all specified fasteners; see General Notes
- Can be installed filling round holes only, or filling round and triangle holes for maximum values
- See alternate installation for applications using the HTU26 on a 2x4 carrying member or HTU28 or HTU210 on a 2x6 carrying member for additional uplift capacity

Options:

- HTU may be skewed up to 67 1/2°. See Hanger Options on p. 204 for allowable loads.
- See engineering letter L-C-HTUSD at strongtie.com for installation with Strong-Drive® SD fasteners.

Codes: See p. 11 for Code Reference Key Chart

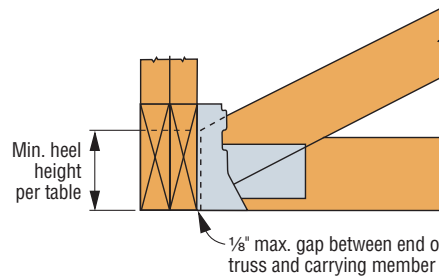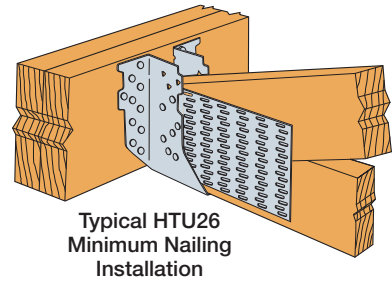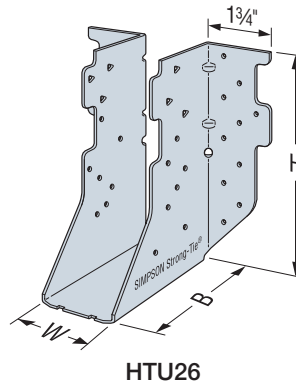

Plated Truss Connectors

SD Many of these products are approved for installation with Strong-Drive® SD Connector screws. See pp. 348-352 for more information.

Standard Allowable Loads (1/8" Maximum Hanger Gap)

Model No.	Min. Heel Height	Dimensions (in.)			Fasteners (in.)		DF/SP Allowable Loads					SPF/HF Allowable Loads					Code Ref.
		W	H	B	Carrying Member	Carried Member	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	
Single 2x Sizes																	
HTU26	3/2	1 5/8	5 7/8	3 1/2	(20) 0.162 x 3 1/2	(11) 0.148 x 1 1/2	640	2,670	2,670	2,670	2,670	550	1,680	1,680	1,680	1,680	IBC, FL, LA
HTU26 (Min.)	3 7/8	1 5/8	5 7/8	3 1/2	(20) 0.162 x 3 1/2	(14) 0.148 x 1 1/2	1,250	2,940	3,200	3,200	3,200	1,075	1,852	2,015	2,015	2,015	
HTU26 (Max.)	5 1/2	1 5/8	5 7/8	3 1/2	(20) 0.162 x 3 1/2	(20) 0.148 x 1 1/2	1,555	2,940	3,320	3,580	4,010	1,335	2,530	2,855	3,080	3,450	
HTU28 (Min.)	3 7/8	1 5/8	7 1/8	3 1/2	(26) 0.162 x 3 1/2	(14) 0.148 x 1 1/2	1,235	3,820	3,895	3,895	3,895	1,060	2,865	2,920	2,920	2,920	
HTU28 (Max.)	7 1/4	1 5/8	7 1/8	3 1/2	(26) 0.162 x 3 1/2	(26) 0.148 x 1 1/2	2,020	3,820	4,315	4,655	5,435	1,735	3,285	3,710	4,005	4,675	
HTU210 (Min.)	3 7/8	1 5/8	9 1/8	3 1/2	(32) 0.162 x 3 1/2	(14) 0.148 x 1 1/2	1,330	4,300	4,300	4,300	4,300	1,145	3,225	3,225	3,225	3,225	
HTU210 (Max.)	9 1/4	1 5/8	9 1/8	3 1/2	(32) 0.162 x 3 1/2	(32) 0.148 x 1 1/2	3,315	4,705	5,310	5,730	5,995	2,850	4,045	4,565	4,930	5,155	
Double 2x Sizes																	
HTU26-2 (Min.)	3 7/8	3 5/8	5 7/8	3 1/2	(20) 0.162 x 3 1/2	(14) 0.148 x 3	1,515	2,940	3,320	3,580	3,910	1,305	1,850	2,090	2,255	2,465	IBC, FL, LA
HTU26-2 (Max.)	5 1/2	3 5/8	5 7/8	3 1/2	(20) 0.162 x 3 1/2	(20) 0.148 x 3	2,175	2,940	3,320	3,580	4,480	1,870	2,530	2,855	3,080	3,855	
HTU28-2 (Min.)	3 7/8	3 5/8	7 1/8	3 1/2	(26) 0.162 x 3 1/2	(14) 0.148 x 3	1,530	3,820	4,310	4,310	4,310	1,315	2,865	3,235	3,235	3,235	
HTU28-2 (Max.)	7 1/4	3 5/8	7 1/8	3 1/2	(26) 0.162 x 3 1/2	(26) 0.148 x 3	3,485	3,820	4,315	4,655	5,825	2,995	3,285	3,710	4,005	5,010	
HTU210-2 (Min.)	3 7/8	3 5/8	9 1/8	3 1/2	(32) 0.162 x 3 1/2	(14) 0.148 x 3	1,755	4,705	4,815	4,815	4,815	1,510	3,530	3,610	3,610	3,610	
HTU210-2 (Max.)	9 1/4	3 5/8	9 1/8	3 1/2	(32) 0.162 x 3 1/2	(32) 0.148 x 3	4,110	4,705	5,310	5,730	6,515	3,535	4,045	4,565	4,930	5,605	

1. The maximum hanger gap is measured between the joist (or truss) end and the carrying member.
2. Minimum heel heights required for full table loads are based on a minimum 2:12 pitch.
3. Uplift loads have been increased for earthquake or wind loading with no further increase allowed. Reduce where other loads govern.
4. Wind (160) is a download rating.
5. For hanger gaps between 1/8" and 1/2", use the Alternate Allowable Loads.
6. Truss chord cross-grain tension may limit allowable loads in accordance with ANSI/TPI 1-2014. Simpson Strong-Tie® Connector Selector™ software includes the evaluation of cross-grain tension in its hanger allowable loads. For additional information, contact Simpson Strong-Tie.
7. Loads shown are based on a minimum two-ply 2x carrying member. For single 2x carrying members, use 0.148" x 1 1/2" nails in the header and reduce the allowable download to 0.70 of the table value. The allowable uplift is 100% of the table load.
8. **Fasteners:** Nail dimensions are listed diameter by length. See pp. 21-22 for fastener information.

HTU

Face-Mount Truss Hanger (cont.)

SD Many of these products are approved for installation with Strong-Drive® SD Connector screws. See pp. 348–352 for more information.

Alternate Installation Table for 2x4 and 2x6 Carrying Member

Model No.	Min. Heel Height (in.)	Minimum Carrying Member	Fasteners (in.)		DF/SP Allowable Loads					SPF/HF Allowable Loads					Code Ref.
			Carrying Member	Carried Member	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	
HTU26 (Min.)	3 $\frac{7}{8}$	(2) 2x4	(10) 0.162 x 3 $\frac{1}{2}$	(14) 0.148 x 1 $\frac{1}{2}$	845	1,470	1,660	1,790	1,875	795	1,265	1,430	1,540	1,615	IBC, FL, LA
HTU26 (Max.)	5 $\frac{1}{2}$	(2) 2x4	(10) 0.162 x 3 $\frac{1}{2}$	(20) 0.148 x 1 $\frac{1}{2}$	1,240	1,470	1,660	1,790	2,220	1,065	1,265	1,430	1,540	1,910	
HTU28 (Max.)	7 $\frac{1}{4}$	(2) 2x6	(20) 0.162 x 3 $\frac{1}{2}$	(26) 0.148 x 1 $\frac{1}{2}$	1,920	2,940	3,320	3,580	3,905	1,650	2,530	2,855	3,080	3,360	
HTU210 (Max.)	9 $\frac{1}{4}$	(2) 2x6	(20) 0.162 x 3 $\frac{1}{2}$	(32) 0.148 x 1 $\frac{1}{2}$	2,880	2,940	3,320	3,580	3,905	2,475	2,530	2,855	3,080	3,360	

- See table below for dimensions and additional footnotes.
- Maximum hanger gap for the alternative installation is $\frac{1}{2}$ ".
- Wind (160) is a download rating.
- Fasteners:** Nail dimensions are listed diameter by length. See pp. 21–22 for fastener information.

Alternative Allowable Loads ($\frac{1}{2}$ " Maximum Hanger Gap)

Model No.	Min. Heel Height	Dimensions (in.)			Fasteners (in.)		DF/SP Allowable Loads					SPF/HF Allowable Loads					Code Ref.
		W	H	B	Carrying Member	Carried Member	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Wind (160)	
Single 2x Sizes																	
HTU26	3 $\frac{1}{2}$	1 $\frac{5}{8}$	5 $\frac{7}{8}$	3 $\frac{1}{2}$	(20) 0.162 x 3 $\frac{1}{2}$	(11) 0.148 x 1 $\frac{1}{2}$	635	2,395	2,395	2,395	2,395	545	1510	1,510	1,510	1,510	IBC, FL, LA
HTU26 (Min.)	3 $\frac{7}{8}$	1 $\frac{5}{8}$	5 $\frac{7}{8}$	3 $\frac{1}{2}$	(20) 0.162 x 3 $\frac{1}{2}$	(14) 0.148 x 1 $\frac{1}{2}$	1,175	2,940	3,100	3,100	3,100	1,010	1,955	1,955	1,955	1,955	
HTU26 (Max.)	5 $\frac{1}{2}$	1 $\frac{5}{8}$	5 $\frac{7}{8}$	3 $\frac{1}{2}$	(20) 0.162 x 3 $\frac{1}{2}$	(20) 0.148 x 1 $\frac{1}{2}$	1,215	2,940	3,320	3,580	3,630	1,045	1,850	2,090	2,285	2,285	
HTU28 (Min.)	3 $\frac{7}{8}$	1 $\frac{5}{8}$	7 $\frac{1}{8}$	3 $\frac{1}{2}$	(26) 0.162 x 3 $\frac{1}{2}$	(14) 0.148 x 1 $\frac{1}{2}$	1,110	3,770	3,770	3,770	3,770	955	2,825	2,825	2,825	2,825	
HTU28 (Max.)	7 $\frac{1}{4}$	1 $\frac{5}{8}$	7 $\frac{1}{8}$	3 $\frac{1}{2}$	(26) 0.162 x 3 $\frac{1}{2}$	(26) 0.148 x 1 $\frac{1}{2}$	1,920	3,820	4,315	4,655	5,015	1,695	2,865	3,235	3,490	3,765	
HTU210 (Min.)	3 $\frac{7}{8}$	1 $\frac{5}{8}$	9 $\frac{1}{8}$	3 $\frac{1}{2}$	(32) 0.162 x 3 $\frac{1}{2}$	(14) 0.148 x 1 $\frac{1}{2}$	1,250	3,600	3,600	3,600	3,600	1,075	2,700	2,700	2,700	2,700	
HTU210 (Max.)	9 $\frac{1}{4}$	1 $\frac{5}{8}$	9 $\frac{1}{8}$	3 $\frac{1}{2}$	(32) 0.162 x 3 $\frac{1}{2}$	(32) 0.148 x 1 $\frac{1}{2}$	3,255	4,705	5,020	5,020	5,020	2,800	3,530	3,765	3,765	3,765	
Double 2x Sizes																	
HTU26-2 (Min.)	3 $\frac{7}{8}$	3 $\frac{5}{8}$	5 $\frac{7}{8}$	3 $\frac{1}{2}$	(20) 0.162 x 3 $\frac{1}{2}$	(14) 0.148 x 3	1,515	2,940	3,320	3,500	3,500	1,305	2,205	2,205	2,205	2,205	IBC, FL, LA
HTU26-2 (Max.)	5 $\frac{1}{2}$	3 $\frac{5}{8}$	5 $\frac{7}{8}$	3 $\frac{1}{2}$	(20) 0.162 x 3 $\frac{1}{2}$	(20) 0.148 x 3	1,910	2,940	3,320	3,500	3,500	1,645	2,205	2,205	2,205	2,205	
HTU28-2 (Min.)	3 $\frac{7}{8}$	3 $\frac{5}{8}$	7 $\frac{1}{8}$	3 $\frac{1}{2}$	(26) 0.162 x 3 $\frac{1}{2}$	(14) 0.148 x 3	1,490	3,820	3,980	3,980	3,980	1,280	2,865	2,985	2,985	2,985	
HTU28-2 (Max.)	7 $\frac{1}{4}$	3 $\frac{5}{8}$	7 $\frac{1}{8}$	3 $\frac{1}{2}$	(26) 0.162 x 3 $\frac{1}{2}$	(26) 0.148 x 3	3,035	3,820	4,315	4,655	5,520	2,610	2,865	3,235	3,490	4,140	
HTU210-2 (Min.)	3 $\frac{7}{8}$	3 $\frac{5}{8}$	9 $\frac{1}{8}$	3 $\frac{1}{2}$	(32) 0.162 x 3 $\frac{1}{2}$	(14) 0.148 x 3	1,755	4,255	4,255	4,255	4,255	1,510	3,190	3,190	3,190	3,190	
HTU210-2 (Max.)	9 $\frac{1}{4}$	3 $\frac{5}{8}$	9 $\frac{1}{8}$	3 $\frac{1}{2}$	(32) 0.162 x 3 $\frac{1}{2}$	(32) 0.148 x 3	3,855	4,705	5,310	5,730	6,470	3,315	3,530	3,980	4,300	4,855	

- The maximum hanger gap is measured between the joist (or truss) end and the carrying member.
- Minimum heel heights required for full table loads are based on a minimum 2:12 pitch.
- Uplift loads have been increased for earthquake or wind loading with no further increase allowed. Reduce where other loads govern.
- Wind (160) is a download rating.
- For hanger gaps between $\frac{1}{8}$ " and $\frac{1}{2}$ ", use the Alternative Allowable Loads.
- Truss chord cross-grain tension may limit allowable loads in accordance with ANSI/TPI 1-2014. Simpson Strong-Tie® Connector Selector™ software includes the evaluation of cross-grain tension in its hanger allowable loads. For additional information, contact Simpson Strong-Tie.
- Loads shown are based on a minimum two-ply 2x carrying member. For single 2x carrying members, use 0.148" x 1 $\frac{1}{2}$ " nails in the header and reduce the allowable download to 0.70 of the table value. The allowable uplift is 100% of the table load.
- Fasteners:** Nail dimensions are listed diameter by length. See pp. 21–22 for fastener information.

HTU

Face-Mount Truss Hanger (cont.)

Options: See Hanger Options information on pp. 97–99.


Skewed Seat

- Skewable up to 67½°
- Available in single and two-ply size
- No bevel cut required


Allowable Loads for Skewed HTU Hangers

Model No.	Skew Angle (Degree)	Fasteners (in.)		DF/SP Allowable Loads		SPF/HF Allowable Loads	
		Carrying Member	Carried Member	Uplift (160)	Download (100/115/125)	Uplift (160)	Download (100/115/125)
HTU26	< 51	(20) 0.162 x 3½	(14) 0.148 x 1½	1,315	2,945	1,130	2,530
	51-67½	(20) 0.162 x 3½	(12) 0.148 x 1½	970	2,595	835	2,230
HTU28	< 51	(26) 0.162 x 3½	(20) 0.148 x 1½	2,015	3,060	1,730	2,630
	51-67½	(26) 0.162 x 3½	(17) 0.148 x 1½	1,485	2,815	1,280	2,420
HTU210	< 51	(32) 0.162 x 3½	(26) 0.148 x 1½	2,715	3,175	2,335	2,730
	51-67½	(32) 0.162 x 3½	(22) 0.148 x 1½	2,005	3,040	1,725	2,615
HTU26-2	< 51	(20) 0.162 x 3½	(14) 0.148 x 3	1,335	2,555	1,145	2,200
	51-67½	(20) 0.162 x 3½	(12) 0.148 x 3	1,110	2,700	955	2,320
HTU28-2	< 51	(26) 0.162 x 3½	(20) 0.148 x 3	2,470	3,890	2,120	3,345
	51-67½	(26) 0.162 x 3½	(17) 0.148 x 3	1,710	3,775	1,470	3,245
HTU210-2	< 51	(32) 0.162 x 3½	(26) 0.148 x 3	3,600	4,935	3,100	4,245
	51-67½	(32) 0.162 x 3½	(22) 0.148 x 3	2,255	4,790	1,940	4,120

1. Uplift loads have been increased for earthquake or wind loading with no further increase allowed. Reduce where other loads govern.
2. Allowable downloads may not be increased.
3. **Fasteners:** Nail dimensions are listed diameter by length. See pp. 21–22 for fastener information.



Top View HTU Hanger Skewed Right < 51°



Top View HTU Hanger Skewed Right ≥ 51°