



InCord®
Custom Safety Netting Solutions

InCord
226 Upton Road
Colchester, CT 06415

Technical Specifications



RocBloc2K™ Debris Containment Net

RocBloc2K Specifications

Structural Netting	M1250BK
Fiber	High Tenacity Polypropylene
Cord Diameter	0.125 in (3 mm)
Mesh Size	2.0 in (50 mm)
Web Border	3.0 in Polypropylene
Grommets	#2 Stainless Steel 2 ft OC
Net Application Rating	2,000 lb (900 kg)
FR Rating (optional)	NFPA 701
UV Rating	300 kLy
Color	Black

Description

RocBloc2K™ nets are used for the static containment of debris, and as a wind and sun block.

RocBloc nets are designed to wrap a debris source to prevent spalling or other loose materials from becoming dangerous falling objects.

RocBloc2K nets are assembled using a two-ply construction method to join a 2" structural net underlay to a 1/4" or 1/16" debris liner.

The layered panels are joined at the border with 3" Polypropylene webbing. Stainless steel border grommets are installed two foot on-center along all sides and offset in corners.

Debris Liner Options

InCord DNR25BK FR - 1/4"

The polyester medium-mesh liner is highly resistant to abrasion and is resistant to fabric tears. DNR25BK FR provides good air flow and light.

Fiber	Polyester, 1000 Denier
Mesh Size	0.25 x 0.375 inch (6 x 10 mm)
Burst Strength	164 lbf minimum
FR Rating	NFPA 701 Method 1


InCord WS70BK FR - 1/16"

The polyethylene mesh monofilament fiber is light weight and is resistant to fabric tears. WS70 is recommended for small particle containment.

Fiber	High Density Polyethylene
Mesh Size	0.0625 inch (1.6 mm)
Burst Strength	252 psi
FR Rating	NFPA 701 Method 2
Shade Factor	70%



RocBloc2K with DNR25 Liner

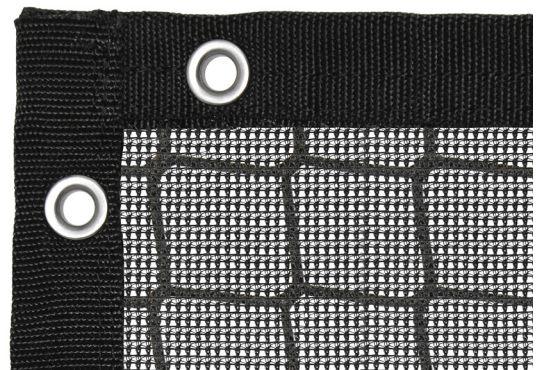

RocBloc2K with WS70 Liner