


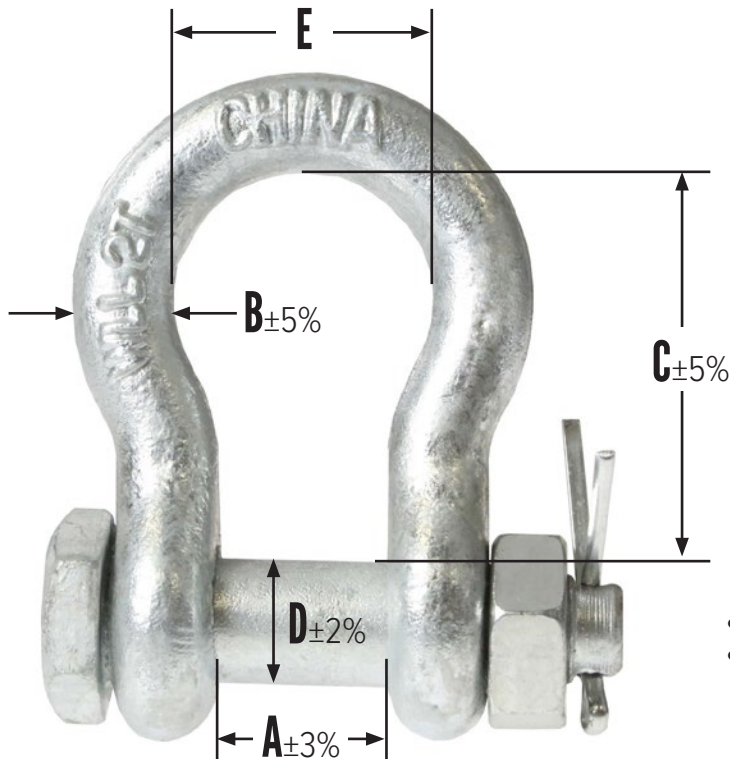

- Made of durable galvanized steel
- Should not be used in high moisture conditions. Stainless steel shackles are recommended for moist conditions.

Size	W.L.L.	M.B.S.	A	B	C	D	E	Weight
inch	T	T	mm	mm	mm	mm	mm	kg/pc
3"	85	510	127	76.2	330.2	80	200.1	69
1"	8.5	51	42.9	25.4	95.3	28.7	68.3	2.4
1-1/2"	17	102	60.5	38.1	146	41.4	98.6	8.46
1-1/8"	9.5	57	46	28.7	107.9	31.8	73.9	3.4
1-1/4"	12	72	51.6	31.8	119.1	35.1	82.6	4.85
1-3/4"	25	150	73.2	44.5	177.8	50.8	127	14
1-3/8"	13.5	81	57.2	35.1	133.3	38.1	92.2	6.5
1/2"	2	12	20.6	12.7	47.8	16	33.3	0.35
2"	35	210	82.5	50.8	196.8	57.2	146	19
2-1/2"	55	330	104.9	66.6	266.7	69.9	186.1	39
3-1/2"	120	720	133.3	91.9	371.6	95.3	228.6	109
3/4"	4.75	28.5	31.8	19.1	71.4	22.4	50.8	1.2
5/16"	0.75	4.5	13.5	7.9	31	9.7	21.3	0.1
1/4"	0.5	3	11.9	6.4	28.7	7.9	19.8	0.08
3/8"	1	6	16.8	9.7	36.6	11.2	26.2	0.15
5/8"	3.25	19.5	26.9	16	60.5	19.1	42.9	0.67
7/8"	6.5	39	36.6	22.4	84.1	25.4	57.9	1.7
7/16"	1.5	9	19.1	11.2	42.9	12.7	29.5	0.22