


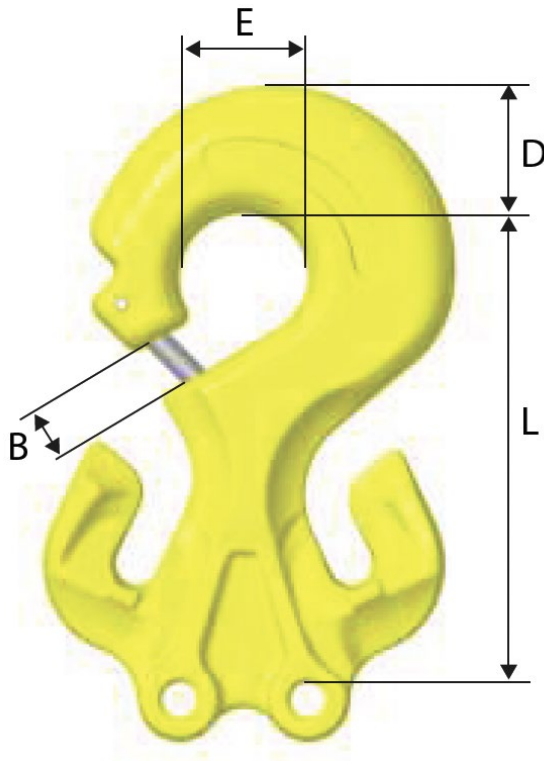

VENDOR#	CODE	WLL (LBS)	DIMENSIONS IN INCHES				WEIGHT (LBS)
			L	B	E	D	
B14720	CGD-6-10	4,700	3.1	0.43	0.94	0.87	1.1
B14721U	CGD-8-10	9,900	4.2	0.47	1.3	1.1	2.4
B14722U	CGD-10-10	15,200	5.3	0.59	1.6	1.5	4.8
B14723	CGD-13-10	26,000	6.8	0.75	1.9	1.9	11.9
B14724U	CGD-16-10	39100	8.5	0.87	2.5	2.2	20.1

- For use with Grade 80 or 100 chain and master links.
- 4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.
- Note: The maximum in service temperature is 392°F.