


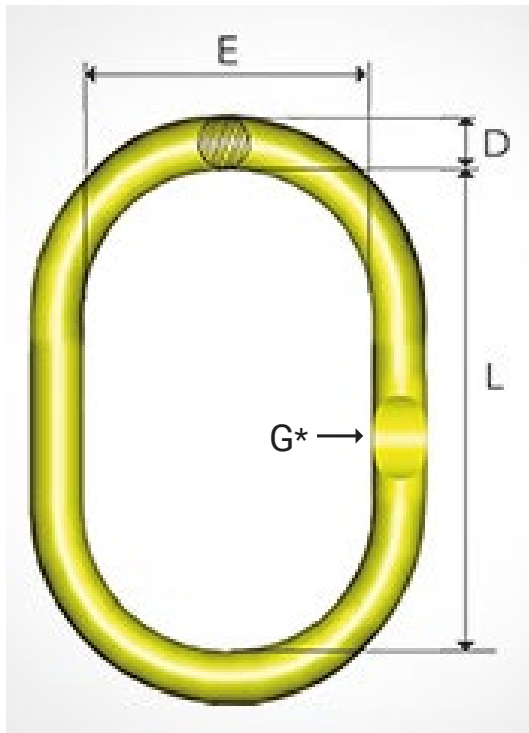

VENDOR#	CODE	WLL t	DIMENSIONS IN MM				WEIGHT KGS
			L	E	D	G*	
Z200060	MF-6-10	2,0	100	60	11	6	0,2
Z200086	MF-86-10	3,2	120	60	13	6	0,4
Z200108	MF-108-10	5,4	140	80	17	8	0,8
Z2111310	MF-1310-10	8,2	160	95	22	10	1,5
Z211613	MF-1613-10	13,6	275	145	28	13	3,9
Z202016	MF-2016-10	20,6	275	145	32	16	5,1
Z202220	MF-2220-10	32,0	270	140	40	20	8,1

- *Thickness of flat
- For 1-, 2-, 3- and 4-leg slings.
- Designed for use with C-Lok CL, C-Lok Duo CLD, C-Grab CG and C-Grab Duo CGD.
- 3- and 4-leg chain slings require C-Lok Duo CLD / C-Grab Duo CGD.
- Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M, ASME B30.26, AS 3775:2014 and AS 3776:2015.