

Framing Nails – Wire Coil

15° Wire Coil, Full Round Head, Ring-Shank Decking/Framing Nail


Features:

- Checker pattern on head blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Annular ring shank increases withdrawal resistance to provide a secure attachment
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

Compatible Pneumatic Tools

If you don't see your particular model in the table below, see strongtie.com/toolmatrix or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

Bostitch®	N80CB (up to 3¼"), N75C (up to 3"), N89C
DeWalt®	D51855
Duo-Fast®	P350C/CNW90, P275C (up to 2¾")
Grip-Rite®	GRTC90-3½, GRTCS250 (up to 0.099", 2½")
Hitachi®	NV65AH (up to 0.099", 2½"), NV75AG (up to 3"), NV83A2
Makita®	AN901
Max®	CN565S (up to 2½", 0.099"), CN565D (up to 2½", 0.113"), CN665 (up to 2½"), CN890S, CN565 (up to 2½", 0.099"), CN100, CN70 (up to 2½"), CN80 (up to 3¼")
Senco®	SCN60XP (up to 2¾", 0.113"), SCN49 (up to 2½", 0.113"), SCN 65XP (up to 0.113"), PalletPro100, PalletPro130 (over 3"), PalletPro70 (up to 2¾", 0.113"), PalletPro83 (up to 3¼")

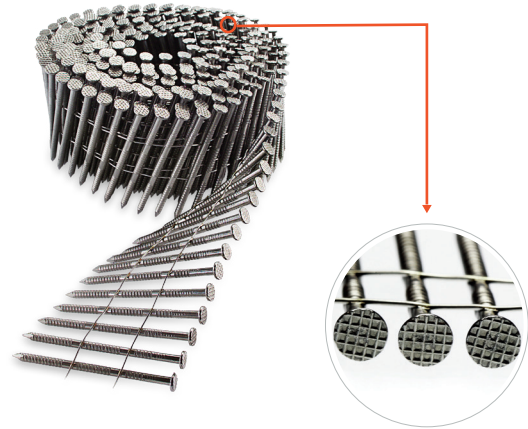

Type 316 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Carton Weight (lb.)	Model No.
6d	2	0.113	¼	3,600	21	T12A200PNB
7d	2¼	0.099	¼	1,800	10	T12A225PNJ
8d	2½	0.099	¼	1,800	10	T12A250PNJ
8d	2½	0.099	¼	3,600	31	T12A250PNB
10d	3	0.120	17/64	1,800	19	T11A300PNJ
10d	3	0.131	9/32	1,800	24	T10A300PNJ
12d	3¼	0.120	17/64	1,800	20	T11A325PNJ
16d	3½	0.131	9/32	1,800	28	T10A350PNJ

Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Carton Quantity	Carton Weight (lb.)	Model No.
4d	1½	0.099	¼	3,600	14	S12A150PNB
5d	1¾	0.099	¼	3,600	15	S12A175PNB
6d	2	0.099	¼	3,600	17	S12A200PNB
8d	2½	0.099	¼	3,600	21	S12A250PNB
8d	2¾	0.113	¼	3,600	26	S12A237PNB
10d	3	0.120	17/64	1,800	19	S11A300PNJ
10d	3	0.131	9/32	1,800	24	S10A300PNJ
12d	3¼	0.120	17/64	1,800	20	S11A325PNJ
12d	3¼	0.131	9/32	1,800	26	S10A325PNJ

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.