

## Siding/Fencing/Trim Nails


# 15° Wire Coil, Painted, Full Round Head, Ring-Shank Nail

### Features:

- Checker pattern on heads blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Durable painted finish helps heads blend with siding material
- Annular ring shank increases withdrawal resistance to provide a secure attachment
- Slender gauge and diamond point for easier driving

### Compatible Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](http://strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

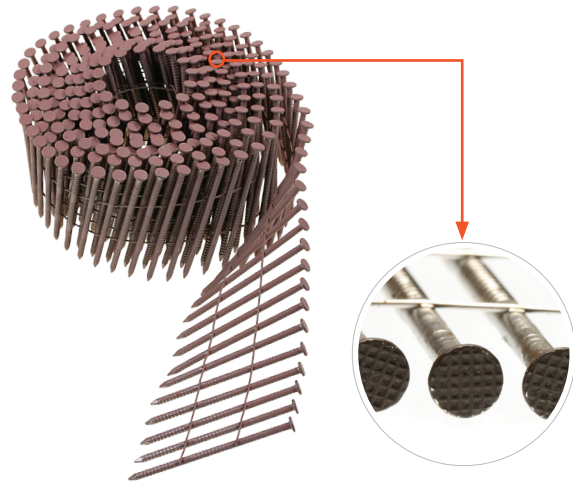

Brand	Model
Bostitch®	N64C, N66C, N75C
Duo-Fast®	P275C
Grip-Rite®	GRTCS250
Hitachi®	NV65AH, NV75AG
Max®	CN55, CN665, CN565, CN565S, CN550S (up to 2")
Senco®	SCN60XP, SCN49, SCN 65XP, Pallet Pro57F (up to 2¼")

## Type 304 Stainless Steel

Penny Size	Length (in.)	Shank Diameter (in.)	Head Diameter (in.)	Color	Carton Quantity	Model No.
6d	2	0.092	0.221	White	1,200	S13A200WWCBP
6d	2	0.092	0.221	Dark Brown	3,600	S13A200CCB
6d	2	0.092	0.221	Gray	3,600	S13A200CCG
6d	2	0.092	0.221	Redwood	3,600	S13A200CCR
6d	2	0.092	0.221	Tan	3,600	S13A200CCT
6d	2	0.092	0.221	White	3,600	S13A200CWH
7d	2¼	0.092	0.221	Dark Brown	3,600	S13A225CCB
7d	2¼	0.092	0.221	Gray	3,600	S13A225CCG
7d	2¼	0.092	0.221	Redwood	3,600	S13A225CCR
7d	2¼	0.092	0.221	Tan	3,600	S13A225CCT
7d	2¼	0.092	0.221	Sienna	3,600	S13A225CCS
8d	2½	0.092	0.221	White	900	S13A250WWCBP
8d	2½	0.092	0.221	Dark Brown	900	S13A250CCBBP
8d	2½	0.092	0.221	Dark Brown	3,600	S13A250CCB
8d	2½	0.092	0.221	Gray	3,600	S13A250CCG
8d	2½	0.092	0.221	Redwood	3,600	S13A250CCR
8d	2½	0.092	0.221	Tan	900	S13A250CCTBP
8d	2½	0.092	0.221	Tan	3,600	S13A250CCT
8d	2½	0.092	0.221	White	3,600	S13A250CWH
8d	2½	0.092	0.221	Sienna	900	S13A250CCSBP
8d	2½	0.092	0.221	Sienna	3,600	S13A250CCS



These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.